




Работа многоквартирной вызывной панели
в HC Team mode


Работа многоквартирной вызывной панели в HC Team mode

Используемое оборудование:
IP Камера: F-VI-1520ISMCBWE1

1. Некоторые модели камер вызывных панелей могут работать в облачном сервисе Hik-Connect Team Mode, совершать вызовы абонентам в приложение без установки домофонов. Для этого необходимо создать новый объект в Hik-Partner Pro в командном режиме. Это можно сделать как через браузер, так и в мобильном приложении. После создания объекта, необходимо выбрать лицензии и добавить оборудование.

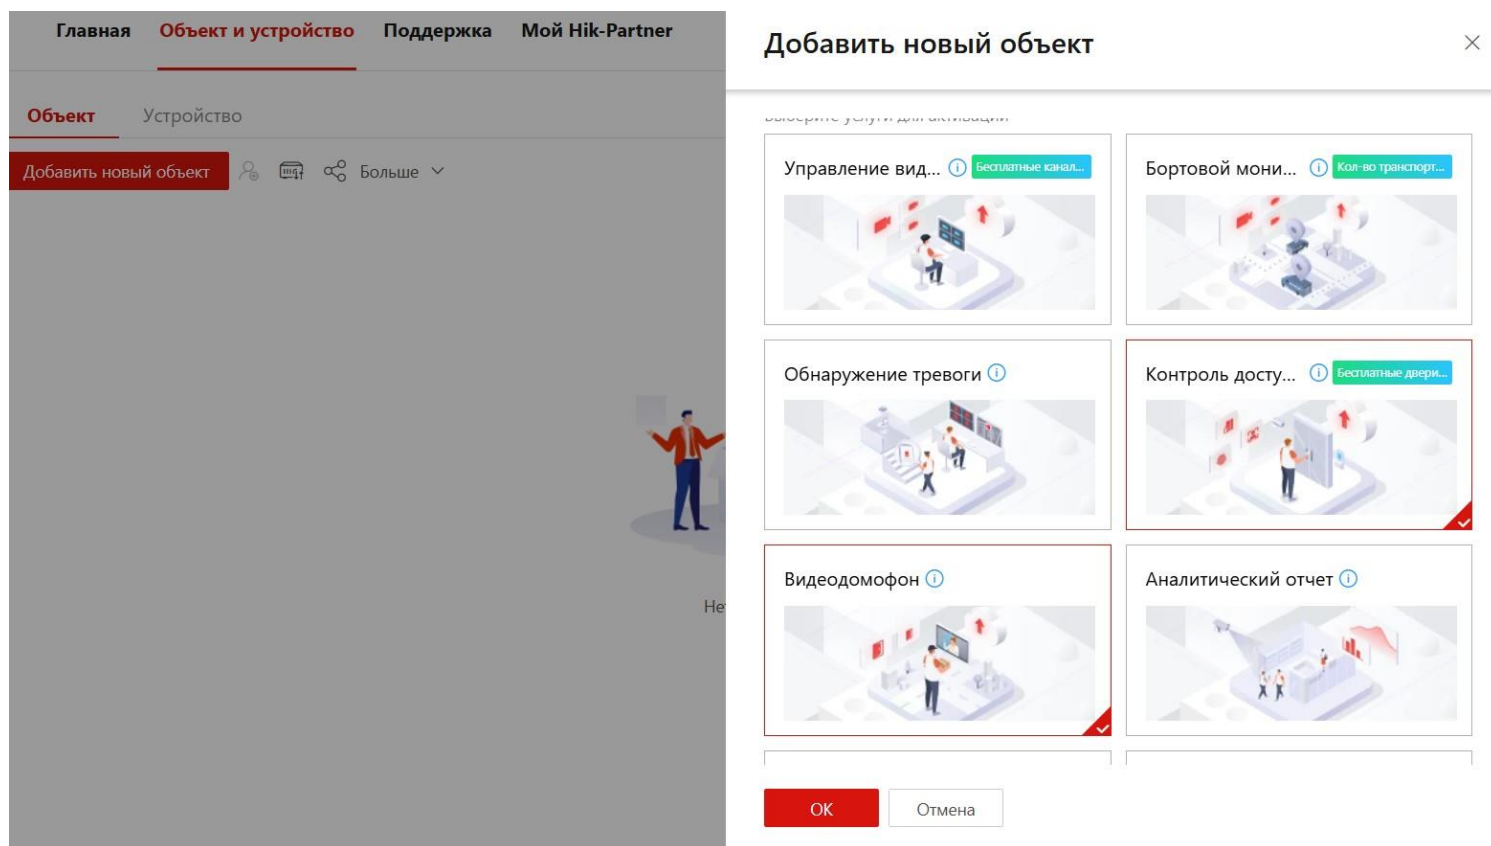

3. В веб браузере необходимо произвести настройку объекта, например создать дом и подъезд. Привязать добавленное устройство к данному объекту.

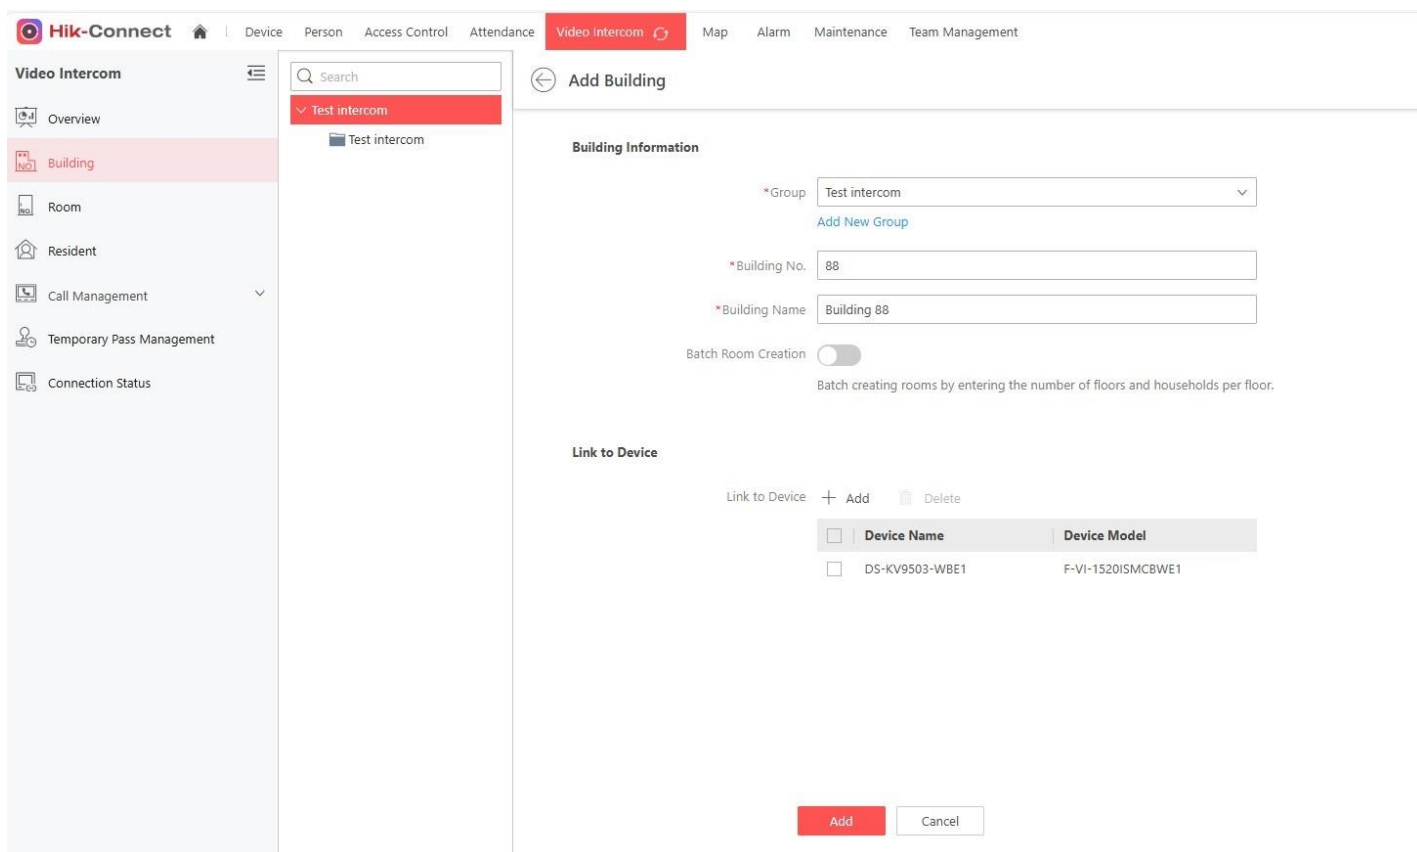

The screenshot shows the Hik-Connect web interface. The top navigation bar includes 'Hik-Connect', a home icon, and tabs for 'Device', 'Person', 'Access Control', 'Attendance', 'Video Intercom' (active), 'Map', 'Alarm', 'Maintenance', and 'Team Management'. The left sidebar under 'Video Intercom' lists 'Overview', 'Building' (selected), 'Room', 'Resident', 'Call Management', 'Temporary Pass Management', and 'Connection Status'. A search bar and a 'Test intercom' button are also visible.

The main content area is titled 'Add Building'. It contains the following sections:

- Building Information:**
 - *Group: A dropdown menu with 'Test intercom' selected and an 'Add New Group' link below it.
 - *Building No.: A text input field containing '88'.
 - *Building Name: A text input field containing 'Building 88'.
 - Batch Room Creation: A toggle switch that is currently turned off. Below it, a note reads: 'Batch creating rooms by entering the number of floors and households per floor.'
- Link to Device:**
 - Buttons: '+ Add' and 'Delete'.
 - Table:

At the bottom right, there are 'Add' and 'Cancel' buttons.

	Device Name	Device Model
☐	DS-KV9503-WBE1	F-VI-1520ISMCBWE1



4. После этого необходимо создать квартиру и создать пользователя. При необходимости можно добавить домофон. Так же собственникам можно назначить различные уровни доступа. После того, как вы завершите настройку, абоненты смогут получать вызовы напрямую с вызывной панели, через облачный сервис.

Hik-Connect | Device | Person | Access Control | Attendance | **Video Intercom** | Map | Alarm | Maintenance | Team Management

Video Intercom

- Overview
- Building
- Room**
- Resident
- Call Management
- Temporary Pass Management
- Connection Status

Search

Edit Room

Housing Information

*Room No. 88

Room Name Ivanoffs

Resident Information

No residents added.
[Add Resident](#)

Indoor Station

Indoor Station + Add Delete

Device Name	Device Model
-------------	--------------

No data.

Save **Cancel**

Hik-Connect | Device | Person | Access Control | Attendance | **Video Intercom** | Map | Alarm | Maintenance | Team Management

Video Intercom

- Overview
- Building
- Room
- Resident**
- Call Management
- Temporary Pass Management
- Connection Status

Search

Edit Resident

Resident Information **Housing Information** **Access Level**

Remark

Housing Information

*Room + Add

88 Ivanoffs

Building: Building 88 | Group: | Resident Type: Householder

Access Level

Open Door via PIN Code ☐

If it is checked, the person should be able to access the doors for which the person has permission by entering the PIN code. No two persons can have the same PIN code. The resident can view this PIN code on the Mobile Client.

Access Level Once a resident is added to a room, the access of the corresponding building will be automatically granted to the resident. If you need to grant other access, add below.

+ Add Delete

Access Level	Access Schedule	Door
☐ Building 88	All-day Temp...	2

Save **Cancel**