

Настройка отправки события с регистратора на E-mail



1. Настройте почту согласно параметрам, указанным для этого почтового сервера

На примере mail.ru:

Далее настраиваем параметры отправителя и куда отправить событие:

No.	Recipient Name	Recipient Address	Operation
1	dmitri (redacted)	(redacted)@flow-tech.ru	[Edit] [Delete]

Нажмите «Сохранить» в конце. Почта настроена. Теперь необходимо включить отправку событий на почту.

2. Отправка событий на почту

Отправку событий на почту можно включить в настройках событий:


The screenshot shows the FLOW web interface with the following elements:

- Left Sidebar:** Contains navigation links like Live View, Event Configuration (highlighted with a red circle 1), Playback, VCA Configuration, Data Archive, Device Access, Storage Management, System Configuration, and Maintenance and Security.
- Top Tabs:** Includes Generic Event (highlighted with a red circle 2), Target Event, Perimeter Protection, Abnormal Behavior Event, Thermal Imaging Event, Alarm Input, Audio Event, Non-Video Event, and Other Events.
- Channel Selection:** A dropdown menu showing "[D1] F-IC-2786CSZ4" (highlighted with a red circle 3).
- Sub Event:** Includes buttons for Motion Detection (highlighted with a red circle 4), Video Tampering, Video Loss, and Scene Change...
- Linkage Method:** A tab labeled "Linkage Method" (highlighted with a red circle 4) containing:
 - Notify Surveillance Center: ☐
 - Alarm Pop-Up Window: ☐
 - Buzzer: ☐
 - Send Email:** ☒ (highlighted with a red circle 5 and a red arrow pointing to it). Next to it is a link "Email Configuration".
- Other Linkages Table:**

Record	Alarm Output	Audio and Light Alarm Linkage
☐ Select All	☐ Select All	☐ Select All
☒ [D1] F-IC-2786CSZ4	☐ Local->1	☐ [D1]F-IC-2786CSZ4-...
☐ [D2] IPCamera 02	☐ [D1]F-IC-2786CSZ4	☐ [D6]F-IC-5648CHSZ2...
☐ [D3] Camera 02	☐ [D1]F-IC-2786CSZ4->1	☐ [D7] F-IC-2646CSZ4-...
- Bottom:** A "Save" button (highlighted with a red circle 6).

3. Проверка и общий вид писем

Для проверки корректности введенных данных воспользуйтесь кнопкой «Тест» в настройках почты:

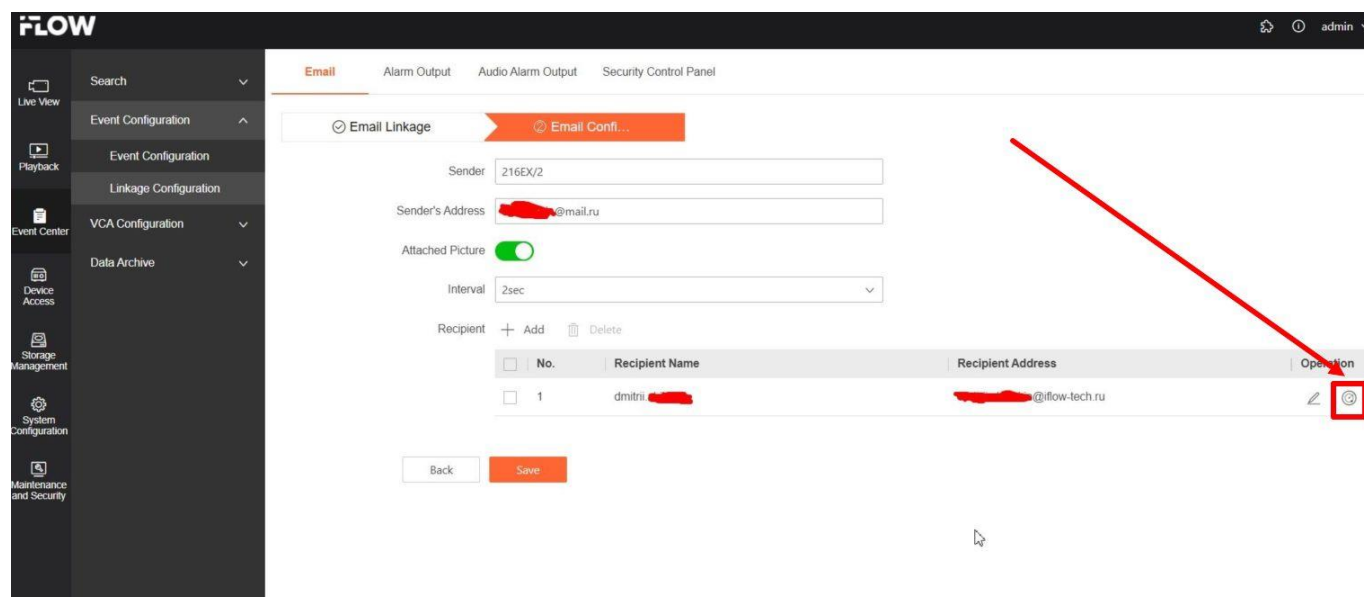

В итоге письмо, которое придет на почту по событию, выглядит так:

Reg216: Motion Detected On Channel D1

21 216EX/2 redacted@mail.ru Сегодня в 16:29
Я >

Язык письма — авто. Перевести на русский?



D01-1.jpg

This is an automatically generated e-mail from your NVR.

EVENT TYPE: Motion Detected
EVENT TIME: 2025-12-15, 16:29:36
NVR NAME: Reg216
NVR S/N: redacted
CAMERA NAME(NUM): F-IC-2786CSZ4(D1)

Оно содержит в себе данные устройства и фотографию или фотографии (количество указывается в настройках).